

Power Sport Battery

1.Maintenance Free VRLA TYPE

Factory Activate and factory sealed battery, 12V-Maintenance Free-Absorbent Glass Mat-VRLA(Valve Regulated Lead Acid)- & Gel Battery.VRLA AGM & Gel means a battery that's perfect for people who have better things to do than battery maintenance. Our permanently sealed VRLA AGM & Gel battery never needs refilling. however, it still needs periodic charging. Ideal for motorcycles, scooters, ATVs, riding mowers and personal watercraft.




2.Maintenance Free AGM batteries

Maintenance Free Batteries are the first with AGM technology. They are 12 Volt with 6 pack acid bottle and valve regulated lead acid battery of AGM technology.



3.High Performance 12-volt Battery

These batteries were the first to be produced with lead-calcium technology, thanks to which performance has been improved and maintenance reduced. But the most important is that life span is longer than the conventional batteries.

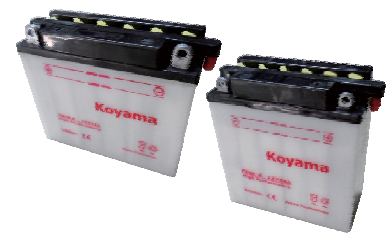

4.Conventional Battery 6/12 Conventional Battery

These are the traditional batteries and they are designed for long-lasting power and convenience which are available, and meet all OE starting requirements. The durable transparent container makes it easy to check electrolyte. It also resists corrosion and vibrations. These batteries are available for every kind of application.



APPLICATIONS:

- Motorcycle
- European & Other Motorcycle
- All terrain
- Water Craft
- Snow Mobiles
- Utility vehicle
- ATV
- Jetski
- Lawn & Garden
- Scooter



Maintenance Free VRLA AGM (Factory Activated)

Battery Type	Capacity Ah (10HR)	Dimensions – Inches (± 1/16 in)			Dimensions – MM (± 2 mm)			Assembly Figure	Approx Weight With Acid (KGS)	Terminal Type	Regular Charge Current (Amp)	C.C.A. @ 0°F (-18°C)
		L	W	H	L	W	H					
YB2.5L-BS(MF)	2.5	3.15	3.03	4.13	80	77	105		1.04	-	0.25	19
YB3L-BS(MF)	3	3.86	2.2	4.29	98	56	109		1.26	5	0.3	32
YB4L-BS(MF)	4	4.45	2.76	3.35	113	70	85		1.38	6	0.4	56
12N5L-BS(MF)	5	4.69	2.36	5.08	119	60	129		1.82	6	0.5	65
12N5D-BS(MF)	5	5.31	2.91	3.74	135	74	95		1.8	4	0.5	65
12N6.5L-BS(MF)	6.5	5.43	2.56	3.94	138	65	100		2.05	6	0.65	65
12N7BL-BS(MF)	7	5.75	2.36	5.04	146	60	128		2.23	6	0.7	74
12N7-BS(MF)	7	5.39	2.99	4.88	137	76	124		2.78	6	0.7	74
12N7L-BS(MF)	7	5.39	2.99	4.88	137	76	124		2.78	6	0.7	74
12N9-BS(MF)	9	5.39	2.99	5.28	137	76	134		2.88	6	0.9	85
YB10L-BS(MF)	11	5.2	3.46	5.71	132	88	145		3.5	4	1.1	103
YB12A-BS(MF)	12	5.28	3.15	6.3	134	80	160		3.65	4	1.2	113
YB14L-BS(MF)	14	5.28	3.5	6.54	134	89	166		4.75	4	1.4	128
YB16L-BS(MF)	19	6.89	3.94	6.1	175	100	155		5.8	4	1.9	190
Y50-N18L-BS(MF)	20	8.07	3.54	6.26	205	90	159		6.3	4	2	200
U1-7(MF)	19	7.68	5.04	6.18	195	128	157		6.8	4	1.9	190
U1-9(MF)	25	7.68	5.04	6.18	195	128	157		7.8	4	2.5	210
U1-11(MF)	32	7.68	5.04	6.18	195	128	157		9.2	4	3.2	230
YT4L-BS(MF)	4	4.45	2.76	3.35	113	70	85		1.38	5	0.4	40
YTX4L-BS(MF)	4	4.45	2.76	3.35	113	70	85		1.49	5	0.4	40
YT5L-BS(MF)	5	4.45	2.76	4.25	113	70	108		1.72	5	0.5	50
YTX5L-BS(MF)	5	4.45	2.76	4.25	113	70	108		1.76	5	0.5	50
YTX7L-BS(MF)	7	4.45	2.76	5.2	113	70	132		2.25	5	0.7	75
YTX7A-BS(MF)	7	5.91	3.43	3.7	150	87	94		2.52	5	0.7	90
YTX9-BS(MF)	8	5.91	3.43	4.13	150	87	105		3.03	5	0.8	120
YTX12A-BS(MF)	9.5	5.91	3.43	4.13	150	87	105		3.1	5	0.95	175
YTX12-BS(MF)	10	5.91	3.43	5.12	150	87	130		3.72	5	1	180
YTX14-BS(MF)	12	5.91	3.43	5.71	150	87	145		4.5	5	1.2	200
YTX14L-BS(MF)	12	5.91	3.43	5.71	150	87	145		4.5	5	1.2	200
YTX14H-BS(MF)	12	5.91	3.43	5.71	150	87	145		4.8	5	1.2	240
YTX14AH-BS(MF)	12	5.28	3.5	6.54	134	89	166		5	4	1.2	210
YTX14AHL-BS(MF)	12	5.28	3.5	6.54	134	89	166		5	4	1.2	210
YTX15L-BS(MF)		6.89	3.43	5.12	175	87	130		5	4	1.3	230
YTX16-BS(MF)	14	5.91	3.43	6.34	150	87	161		5.38	4	1.4	230
YTX20-BS(MF)	18	6.89	3.43	6.1	175	87	155		6.3	4	1.8	270
YTX20L-BS(MF)	18	6.89	3.43	6.1	175	87	155		6.3	4	1.8	270
YTX20CH-BS(MF)	18	5.91	3.43	6.34	150	87	161		6	5	1.8	310
YTX20H-BS(MF)	18	6.89	3.43	6.1	175	87	155		6.8	4	1.8	310
YTX20HL-BS(MF)	18	6.89	3.43	6.1	175	87	155		6.8	4	1.8	310
YTX24HL-BS(MF)	21	8.07	3.43	6.38	205	87	162		7.96	4	2.1	350
YIX30L-BS(MF)	30	6.54	4.96	6.89	166	126	175		10	4	3	400
YTX32HL-BS(MF)	32	6.54	4.96	6.89	166	126	175		11	14	3.2	500

Maintenance Free VRLA AGM (Factory Activated)

Battery Type	Capacity Ah (10HR)	Dimensions – Inches (± 1/16 in)			Dimensions – MM (± 2 mm)			Assembly Figure	Approx Weight With Acid (KGS)	Terminal Type	Regular Charge Current (Amp)	C.C.A. @ 0°F (-18°C)
		L	W	H	L	W	H					
YT4B-5(MF)	2.3	4.49	1.54	3.43	114	39	87		0.85	13	0.23	40
YTR4A-BS(MF)	2.3	4.49	1.93	3.43	114	49	87		0.99	12	0.23	45
YTZ3S(MF)	3.5	4.45	2.76	3.35	113	70	85		1.37	11	0.35	50
YTZ5S(MF)	4	4.45	2.76	3.35	113	70	85		1.48	11	0.4	55
YTZ7S(MF)	6	4.45	2.76	4.25	113	70	108		2.1	11	0.6	130
YTZ10S(MF)	8.6	5.91	3.43	3.7	150	87	94		2.99	11	0.86	190
YTZ12S(MF)	11	5.91	3.43	4.33	150	87	110		3.2	11	1.1	210
YTZ14S(MF)	11.2	5.91	3.43	4.33	150	87	110		3.2	11	1.12	230
YT6B-3(MF)	6	4.45	2.76	4.25	113	70	108		2	11	0.6	130
YT7B-4(MF)	6.5	5.91	2.56	3.7	150	65	94		2.1	11	0.65	85
YT9B-4(MF)	8	5.91	2.76	4.13	150	70	105		2.7	11	0.8	115
YT12B-4(MF)	10	5.91	2.76	5.12	150	70	130		3.2	11	1	125
YT14B-4(MF)	12	5.91	2.76	5.71	150	70	145		3.7	11	1.2	135
YT20-4(MF)	18	6.89	3.43	6.1	175	87	155		6.4	11	1.8	270

Maintenance Free VRLA Gel (Factory Activated)

12-VOLT MOTORCYCLE NANO GEL SEALED BATTERY - VRLA (Valve Regulated Lead Acid)									
Model No.	Intel Model No	Rated Voltage	20h Rated Capacity	Overall Dimension (mm)			Assembly Figure	Terminal Type	Approx. Weight (kg)
		(V)	Ah	L	W	H			kgs
GT7B-4	YT7B-4	12	6	150	65	92		6	2.44
GT9B-4	YT9B-4	12	8	150	69	105		6	2.96
GT12B-4	YT12B-4	12	10	150	70	130		11	3.68
GT14B-4	YT14B-4	12	12	150	70	145		11	4.27
GT3ZS	YTZ3S	12	3	113	70	85		12	1.4
GT5ZS	YTZ5S	12	4	113	70	85		12	1.48
GTZ7S	YTZ7S	12	6	113	70	108		11	1.93
GTZ10S	YTZ10S	12	8.6	150	87	94		11	2.64
GTZ12S	YTZ12S	12	11	150	87	110		11	3.31
GTZ14S	YTZ14S	12	12	150	87	110		11	3.38
GYZ16S	GYZ16H	12	16	150	87	145		12	4.62
YB9-BS(MF)	12N9-BS	12	9	137	77	135		6	2.8
GHD14H-BS	BA14SHD	12	14	149	87	144		21	4.6
GHD14HL-BS	B14HLSHD	12	14	149	87	144		21	4.6
GHD20H-BS	BA20SHD	12	20	176	87	154		20	6.5
GHD20HL-BS	BA20LSHD	12	20	176	87	154		20	6.5
GHD30H-BS	BA30SHD	12	30	166	130	175		20	9.83
GHD30HL-BS	BA30LSHD	12	30	166	130	175		20	9.83
GHD32H-BS	BA32SHD	12	32	166	130	175		20	10.4
GHD32HL-BS	BA32SHD	12	32	166	130	175		20	10.4
GHD32CHL-BS	BA32CLSHD	12	32	166	130	197		20	10.4

Maintenance Free AGM Battery (With Fresh Acid Pack)

Battery Type	Capacity Ah (10HR)	Dimensions – Inches (± 1/16 in)			Dimensions – MM (± 2 mm)			Assembly Figure	Approx Weight With Acid (KGS)	Terminal Type	Acid Volume (L)	Regular Charge Current (Amp)	C.C.A. @ 0°F (-18°C)
		L	W	H	L	W	H						
YTR4A-BS	2.3	4.49	1.93	3.39	114	49	86		1.09	12	0.14	0.3	45
YT4B-BS	2.3	4.49	1.54	3.43	114	39	87		1.09	13	0.12	0.3	40
YTX4L-BS	3	4.49	2.8	3.39	114	71	86		1.55	5	0.18	0.4	50
YTZ5S	3.5	4.45	2.76	3.39	113	70	86		1.59	5	0.2	0.4	65
YTX5L-BS	4	4.49	2.8	4.17	114	71	106		1.91	5	0.24	0.5	80
YT7B-BS	6.5	5.91	2.56	3.66	150	65	93		2.68	11	0.33	0.7	120
YTX7A-BS	6	5.91	3.43	3.7	150	87	94		2.86	5	0.33	0.7	105
YTX7L-BS	6	4.49	2.8	5.16	114	71	131		2.77	5	0.33	0.6	100
YT9B-BS	8	5.91	2.76	4.13	150	70	105		3.95	11	0.4	0.8	115
YTX9-BS	8	5.91	3.43	4.13	150	87	105		3.00	5	0.4	0.9	135
YT12A-BS	10	5.91	3.43	4.13	150	87	105		3.50	5	0.47	1	175
YT12B-BS	10	5.91	2.72	5.12	150	69	130		4.09	11	0.52	1	210
YTX12-BS	10	5.91	3.43	5.12	150	87	130		4.18	5	0.6	1.2	180
YT14B-BS	12	5.91	2.76	5.71	150	70	145		5.36	11	0.6	1.2	210
YTX14-BS	12	5.91	3.43	5.71	150	87	145		4.59	5	0.69	1.4	200
YTX14L-BS	12	5.91	3.43	5.71	150	87	145		4.59	5	0.69	1.4	200
YTX14H-BS	12	5.91	3.43	5.71	150	87	145		4.82	5	0.69	1.2	240
YTX14AH-BS	12	5.28	3.5	6.54	134	89	166		5.05	4	0.66	1.2	210
YTX14AHL-BS	12	5.28	3.5	6.54	134	89	166		5.05	4	0.66	1.2	210
YTX15L-BS	13	6.89	3.43	5.12	175	87	130		5.00	4	0.69	1.3	230
YTX16-BS	14	5.91	3.43	6.34	150	87	161		5.73	4	0.78	1.4	230
YTX16-BS-1	14	5.91	3.43	6.34	150	87	161		5.73	4	0.78	1.4	230
YT19BL-BS	18	7.24	3.19	6.69	184	81	170		5.68	10	0.95	1.8	170
YTX20CH-BS	18	5.91	3.43	6.34	150	87	161		6.09	5	0.82	1.8	270
YTX20-BS	18	6.89	3.43	6.89	175	87	175		6.32	4	0.93	1.8	270
YTX20L-BS	18	6.89	3.43	6.89	175	87	175		6.32	4	0.93	1.8	270
YTX20H-BS	18	6.89	3.43	6.1	175	87	155		6.86	4	0.93	1.8	310
YTX20HL-BS	18	6.89	3.43	6.1	175	87	155		6.86	4	0.93	1.8	310
YIX20HL-BS	18	6.89	3.43	6.1	175	87	155		6.86	4	0.93	1.8	320
YIX30L-BS	30	6.54	4.96	6.89	166	126	175		10.00	4	1.4	3	400
YB2.5L-BS	2.5	3.15	2.8	4.09	80	71	104		1.05		0.18	0.25	45
YB3L-BS	3	3.86	2.28	4.25	98	58	108		1.2	6	0.2	0.3	50
YB4L-BS	4	4.72	2.8	3.54	120	71	90		1.5	5	0.23	0.4	55
YB5L-BS	5	4.72	2.36	4.92	120	60	125		1.9	6	0.27	0.5	65
YTX6.5L-BS	6	5.43	2.6	3.86	138	66	98		2	6	0.3	0.6	70
YTX7BL-BS	7	5.83	2.36	5.12	148	60	130		2.5	6	0.42	0.7	100
YTX7C-BS	7	5.31	2.95	4.72	135	75	120		2.5	6	0.42	0.7	100
YTX9A-BS	9	5.31	2.95	5.39	135	75	137		2.65	6	0.46	0.9	150

High Performance 12V Conventional Battery

Battery Type	Capacity Ah (10HR)	Dimensions – Inches (± 1/16 in)			Dimensions – MM (± 2 mm)			Assembly Figure	Approx Weight w/out Acid (KGS)	Terminal Type	Acid Volume (L)	Regular Charge Current (Amp)
		L	W	H	L	W	H					
YB2.5L-C	2.5	3.15	2.76	4.13	80	70	105		0.77	-	0.21	0.3
YB2.5L-C-1	2.5	3.15	2.76	4.13	80	70	105		0.77	-	0.21	0.3
YB3L-A	3	3.86	2.20	4.33	98	56	110		1.14	6	0.21	0.3
YB3L-B	3	3.86	2.20	4.33	98	56	110		1.14	6	0.21	0.3
YB4L-A	4	4.72	2.76	3.62	120	70	92		1.27	5	0.26	0.4
YB4L-B	4	4.72	2.76	3.62	120	70	92		1.27	5	0.26	0.4
YB5L-B	5	4.72	2.36	5.12	120	60	130		1.59	6	0.32	0.5
YB6L-B	6	5.43	2.85	3.94	138	72.5	100		1.59	6	0.32	0.5
YB7-A	8	5.31	2.95	5.24	135	75	133		2.32	6	0.53	0.8
YB7B-B	7	5.91	2.36	5.12	150	60	130		1.82	6	0.44	0.7
YB7C-A	8	5.12	3.54	4.49	130	90	114		2.32	1	0.53	0.8
YB7L-B	8	5.31	2.95	5.24	135	75	133		2.32	6	0.53	0.8
YB9A-A	9	5.31	2.95	6.10	135	75	155		2.41	6	0.53	0.9
YB9L-A2	9	5.31	2.95	5.47	135	75	139		2.41	2	0.53	0.9
YB9-B	9	5.31	2.95	5.47	135	75	139		2.41	6	0.53	0.9
YB9L-B	9	5.31	2.95	5.47	135	75	139		2.41	6	0.53	0.9
YB10A-A2	11	5.31	3.54	6.10	135	90	155		3.18	8	0.70	1.1
YB10L-A2	11	5.31	3.54	5.71	135	90	145		3.18	8	0.70	1.1
YB10L-B	11	5.31	3.54	5.71	135	90	145		3.18	6	0.70	1.1
YB10L-B2	11	5.31	3.54	5.71	135	90	145		3.18	8	0.70	1.1
YB12A-A	12	5.28	3.15	6.30	134	80	160		3.09	6	0.70	1.2
YB12AL-A	12	5.28	3.15	6.30	134	80	160		3.09	6	0.66	1.2
YB12AL-A2	12	5.28	3.15	6.30	134	80	160		3.09	8	0.66	1.2
YB12A-B	12	5.28	3.15	6.30	134	80	160		3.09	6	0.66	1.2
YB12B-B2	12	6.30	3.54	5.12	160	90	130		3.23	8	0.70	1.2
YB12C-A	12	5.28	3.15	6.89	134	80	175		3.23	4	0.70	1.2
YB14-A2	14	5.28	3.50	6.54	134	89	166		3.45	8	0.79	1.4
YB14A-A1	14	5.28	3.50	6.93	134	89	176		3.59	6	0.79	1.4
YB14A-A2	14	5.28	3.50	6.93	134	89	176		3.59	8	0.79	1.4
YB14L-A1	14	5.28	3.50	6.54	134	89	166		3.45	1	0.79	1.4
YB14L-A2	14	5.28	3.50	6.54	134	89	166		3.45	8	0.79	1.4
YB14L-B2	14	5.28	3.50	6.54	134	89	166		3.45	8	0.79	1.4
YB14-B2	14	5.28	3.50	6.54	134	89	166		3.45	8	0.79	1.4
SYB14L-A2	14	5.28	3.50	6.54	134	89	166		3.45	8	0.79	1.4
YB16AL-A2	16	8.15	2.81	6.46	207	71.5	164		3.91	2	0.97	1.6
HYB16A-AB	16	5.94	3.58	7.09	151	91	180		3.86	7	0.79	1.6
YB16-B	19	6.89	3.94	6.10	175	100	155		4.77	6	1.05	1.9
YB16-B-CX	19	6.89	3.94	6.10	175	100	155		4.77	6	1.05	1.9
YB16HL-A-CX	19	6.89	3.94	6.10	175	100	155		4.77	6	1.05	1.9
YB16L-B	19	6.89	3.94	6.10	175	100	155		4.77	6	1.05	1.9

High Performance 12V Conventional Battery

Battery Type	Capacity Ah (10HR)	Dimensions – Inches (± 1/16 in)			Dimensions – MM (± 2 mm)			Assembly Figure	Approx Weight w/out Acid (KGS)	Terminal Type	Acid Volume (L)	Regular Charge Current (Amp)
		L	W	H	L	W	H					
YB16B-A	16	6.30	3.54	6.34	160	90	161		3.82	4	0.88	1.6
YB16B-A1	16	6.30	3.54	6.34	160	90	161		3.82	7	0.88	1.6
YB16C-B	19	6.89	3.94	6.89	175	100	175		4.59	5	1.05	1.9
YB16CL-B	19	6.89	3.94	6.89	175	100	175		4.59	5	1.05	1.9
YB18-A	18	7.09	3.54	6.38	180	90	162		4.27	7	1.05	1.8
YB18L-A	18	7.09	3.54	6.38	180	90	162		4.27	7	1.05	1.8
Y50-N18A-A	20	8.07	3.54	6.93	205	90	176		5.09	7	1.32	2
Y50-N18L-A	20	8.07	3.54	6.38	205	90	162		5.09	7	1.14	2
Y50-N18L-A-CX	20	8.07	3.54	6.38	205	90	162		5.09	7	1.14	2
Y50-N18L-A3	20	8.07	3.54	6.38	205	90	162		5.09	4	1.14	2
SY50-N18L	20	8.07	3.54	6.38	205	90	162		5.09	7	1.14	2
YB30L-B	30	6.61	5.20	6.93	168	132	176		6.41	4	1.49	3
YB30CL-B	30	6.61	5.20	7.57	168	132	192		6.59	4	1.49	3
51814	19	7.32	3.23	6.73	186	82	171		4.27	10	0.88	1.9
51913	19	7.32	3.23	6.73	186	82	171		4.27	10	0.88	1.9
53030	30	7.32	5.12	6.73	186	130	171		7.32	10	1.40	3

6/12V Conventional Batteries

Battery Type	Capacity Ah (10HR)	Dimensions – Inches (± 1/16 in)			Dimensions – MM (± 2 mm)			Assembly Figure	Approx Weight w/out Acid (KGS)	Terminal Type	Acid Volume (L)	Regular Charge Current (Amp)
		L	W	H	L	W	H					
6N2-2A	2	2.76	1.77	3.82	70	45	97		0.45		0.10	0.2
6N2-2A-3	2	2.76	1.81	3.82	70	46	97		0.45		0.10	0.2
6N2-2A-4	2	2.76	1.81	3.82	70	46	97		0.45		0.10	0.2
6N2-2A-8	2	2.76	1.81	3.82	70	46	97		0.45		0.10	0.2
6N2A-2C	2	2.80	1.85	4.13	71	47	105		0.45		0.10	0.2
6N2A-2C-1	2	2.80	1.85	4.13	71	47	105		0.45		0.10	0.2
6N2A-2C-3	2	2.80	1.85	4.13	71	47	105		0.59		0.10	0.2
6N4-2A	4	2.80	2.80	3.70	71	71	94		0.59		0.20	0.4
6N4-2A-4	4	2.80	2.80	3.70	71	71	94		0.59		0.20	0.4
6N4-2A-5	4	2.80	2.80	3.70	71	71	94		0.59		0.20	0.4
6N4-2A-6	4	2.80	2.80	3.70	71	71	94		0.59		0.20	0.4
6N4-2A-8	4	2.80	2.80	3.70	71	71	94		0.77		0.20	0.4
6N4A-4D	4	2.24	2.40	5.12	57	61	130		0.77		0.20	0.4
6N4B-2A	4	3.98	1.85	3.70	101	47	94		0.77		0.20	0.4
6N4B-2A-3	4	3.98	1.85	3.74	101	47	95		0.77		0.20	0.4
6N4B-2A-5	4	3.98	1.85	3.74	101	47	95		0.64		0.20	0.4
6N4C-1B	4	2.72	2.76	4.09	69	70	104		0.82		0.20	0.4
6N5.5-1D	5.5	3.46	2.76	3.86	88	70	98		0.91		0.30	0.55
6N6-3B	6	3.90	2.28	4.29	99	58	109		0.91	6	0.30	0.6
6N6-3B-1	6	3.90	2.20	4.29	99	56	109		0.91	6	0.30	0.6
6N6-1D-2	6	3.90	2.20	4.29	99	56	109		1.59		0.30	0.6
6N11-2D	11	5.83	2.72	4.06	148	69	103		1.59	6	0.40	1.1
6N11A-1B	11	4.72	2.36	5.16	120	60	131		1.73	6	0.40	1.1
B54-6	12	6.06	2.17	4.53	154	55	115		1.73	6	0.50	1.2
6N12A-2D	12	6.06	2.17	4.53	154	55	115		2.14	6	0.45	1.2
B38-6A	13	4.69	3.27	6.34	119	83	161		1.36	6	0.62	1.3
6YB8L-B	8	4.69	2.80	3.82	119	71	97		2.00	6	0.31	0.8
6YB11-2D	11	5.83	2.72	3.86	148	69	98		4.4	6	0.40	1.1
12N5-3B	5	4.72	2.36	5.12	120	60	130		1.4	6	0.4	0.5
12N5-4B	5	4.72	2.36	5.12	120	60	130		1.4	6	0.4	0.5
12N5.5-3B	5.5	5.31	2.36	5.12	135	60	130		2.0	6	0.4	0.6
12N5.5-4A	5.5	5.31	2.36	5.12	135	60	130		2.0	2	0.4	0.6
12N5.5A-3B	5.5	4.06	3.54	4.49	103	90	114		2.0	6	0.5	0.6
12N7-3B	7	5.31	2.95	5.24	135	75	133		2.2	6	0.5	0.7
12N7-4A	7	5.31	2.95	5.24	135	75	133		2.2	6	0.5	0.7
12N7-4B	7	5.31	2.95	5.24	135	75	133		2.2	6	0.5	0.7
12N7D-3B	7	5.31	2.95	5.91	135	75	150		2.2	6	0.6	0.7
12N9-3A	9	5.31	2.95	5.47	135	75	139		2.5	9	0.6	0.9
12N9-3B	9	5.31	2.95	5.47	135	75	139		2.5	6	0.6	0.9
12N9-4B-1	9	5.31	2.95	5.47	135	75	139		2.5	6	0.6	0.9
12N12A-4A-1	12	5.28	3.15	6.30	134	80	160		3.1	6	0.7	1.2
12N14-3A	14	5.28	3.50	6.54	134	89	166		3.4	8	0.8	1.4
12N24-3A	24	7.24	4.88	6.89	184	124	175		5.5	3	1.2	2.4
12N24-3	24	7.24	4.88	6.89	184	124	175		5.5	3	1.2	2.4
YHD-12H	29	8.11	5.24	6.50	206	133	165		6.0	9	2.0	2.8

Terminal

Terminal				Battery Type				
Type	Front	Side	Top					
1				YB14L-A1 YTX16-BS-1				
2				YB9L-A2 12N5.5-4A		YB16AL-A2		
3				YB7C-A 12N24-3	Y60-N24AL-B 12N24-3A	Y60-N24-A		
4				YB12C-A YTX14L-BS YTX20-BS YTX20HL-BS-PW	YB16B-A YTX14AH-BS YTX20L-BS YTX24HL	Y50-N18L-A3 YTX14AHL-BS YTX20H-BS YTX24HL-BS	YB30L-B YTX15L-BS YTX20HL-BS	YB30CL-B YTX20CH-BS YTX20HL-PW
5				YTX4L-BS YTX9-BS YB4L-A	YTX5L-BS YTX12-BS YB4L-B	YTZ7S KMX14-BS YB16C-B	YTX7A-BS YTX14-BS YB16CL-B	YTX7L-BS YTX16-BS YIX30L
6				YB3L-A YB7L-B YB12A-A YB16-B-CX 12N5-3B 12N7-4A 12N9-4B-1 6N6-3B B39-6	YB3L-B YB9A-A YB12AL-A YB16L-B 12N5-4B 12N7-4B 12N10-3A 6N6-3B-1 B54-6	YB5L-B YB9-B YB12A-B YB16HL-A-CX 12N5.5-3B 12N7D-3B 12N10-3A-1 6N11A-1B B38-6A	YB7-A YB9L-B YB14A-A1 SYB16L-B 12N5.5A-3B 12N9-3A-1 12N12A-4A-1 6N11-2D	YB7B-B YB10L-B YB16-B 12N7-3B 12N9-3B 6N12A-2D
7				HYB16A-AB Y50-N18A-A	YB16B-A1** Y50-N18L-A	YB18-A Y50-N18L-A-CX	YB18L-A SY50-N18L-AT	
8				YB10A-A2 YB12B-B2 SYB14L-A2 12N10-3A-2	YB10L-A2 YB14-A2 YB14-B2 12N11-3A-1	YB10L-B2 YB14A-A2 YB14L-B2 12N14-3A	YB12AL-A2* YB14L-A2	
9				YHD-12 12N9-3A				
10				51814	51913	53030		
11				YT9B-4 YT7B-BS	YTZ10S YTR9-BS	YTZ12S YT12A-BS	YTZ14S YT12B-BS	YT14B-4
12				YTR4A-BS				
13				YT4B-BS				

** Includes terminal adaptor for converting to side mount.

* Includes terminal adaptor for converting to top mount.